

Width	Hearth × Depth	Door Height
5'	4' or 5'	3'
6'	4' or 5'	

(Custom sizes available)

Fiberfrax™ Lining
 Standard 9" – AL 2 2200°F
 Optional 9" – AL 2 2600°F


Tru-Flow
Hearth

Standards

NFPA 86
UL 508A

Features



Standard
Optional

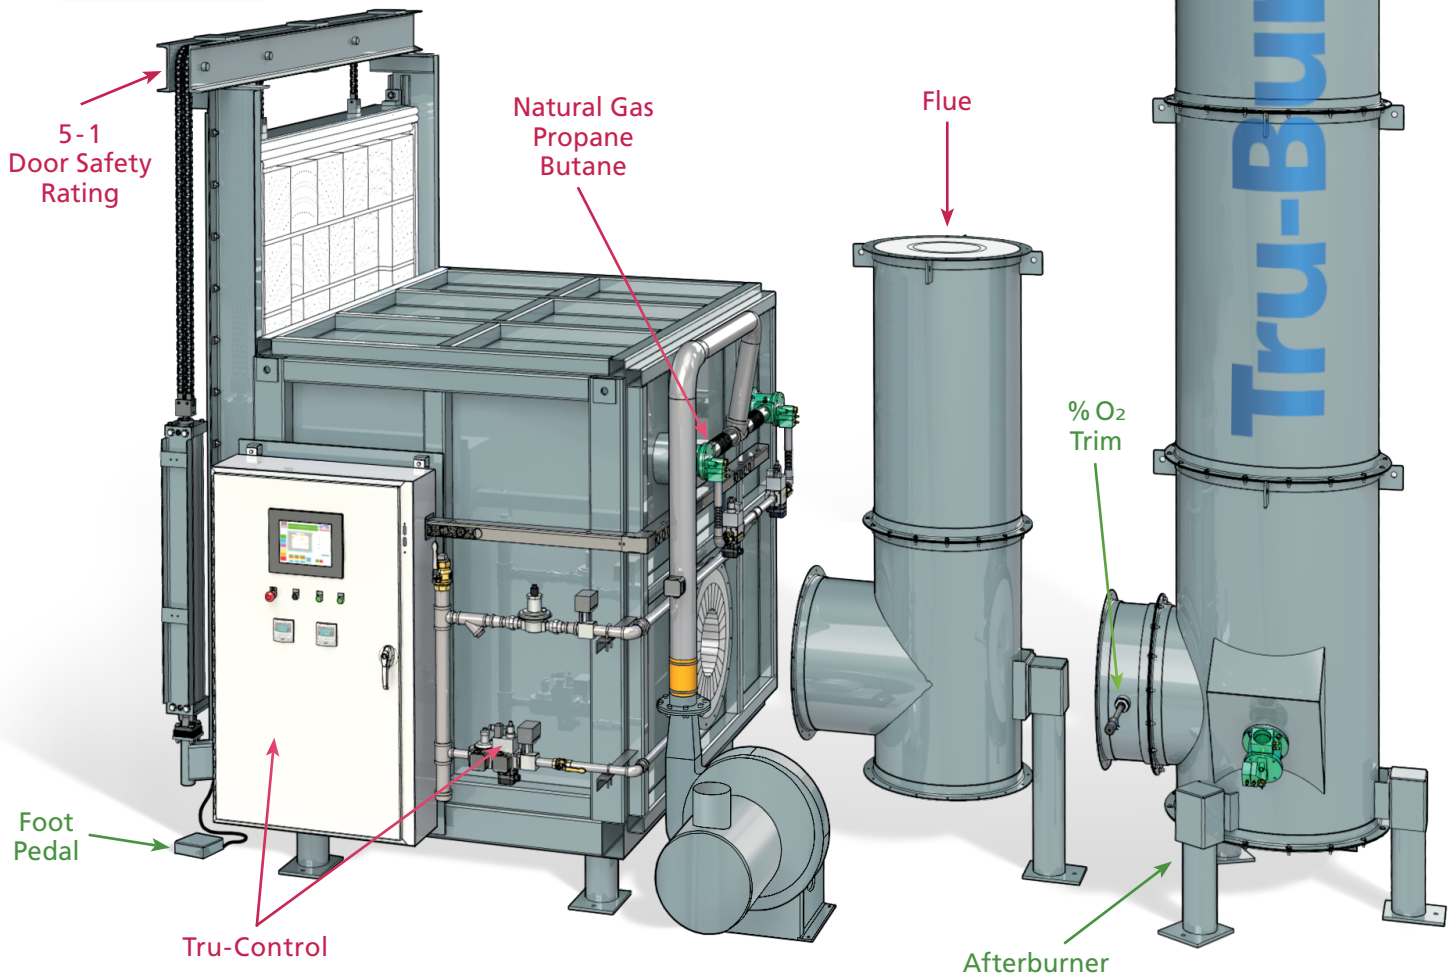

Tru-Heat® 450°– 2200°F Furnace System

Features

Standard	Optional

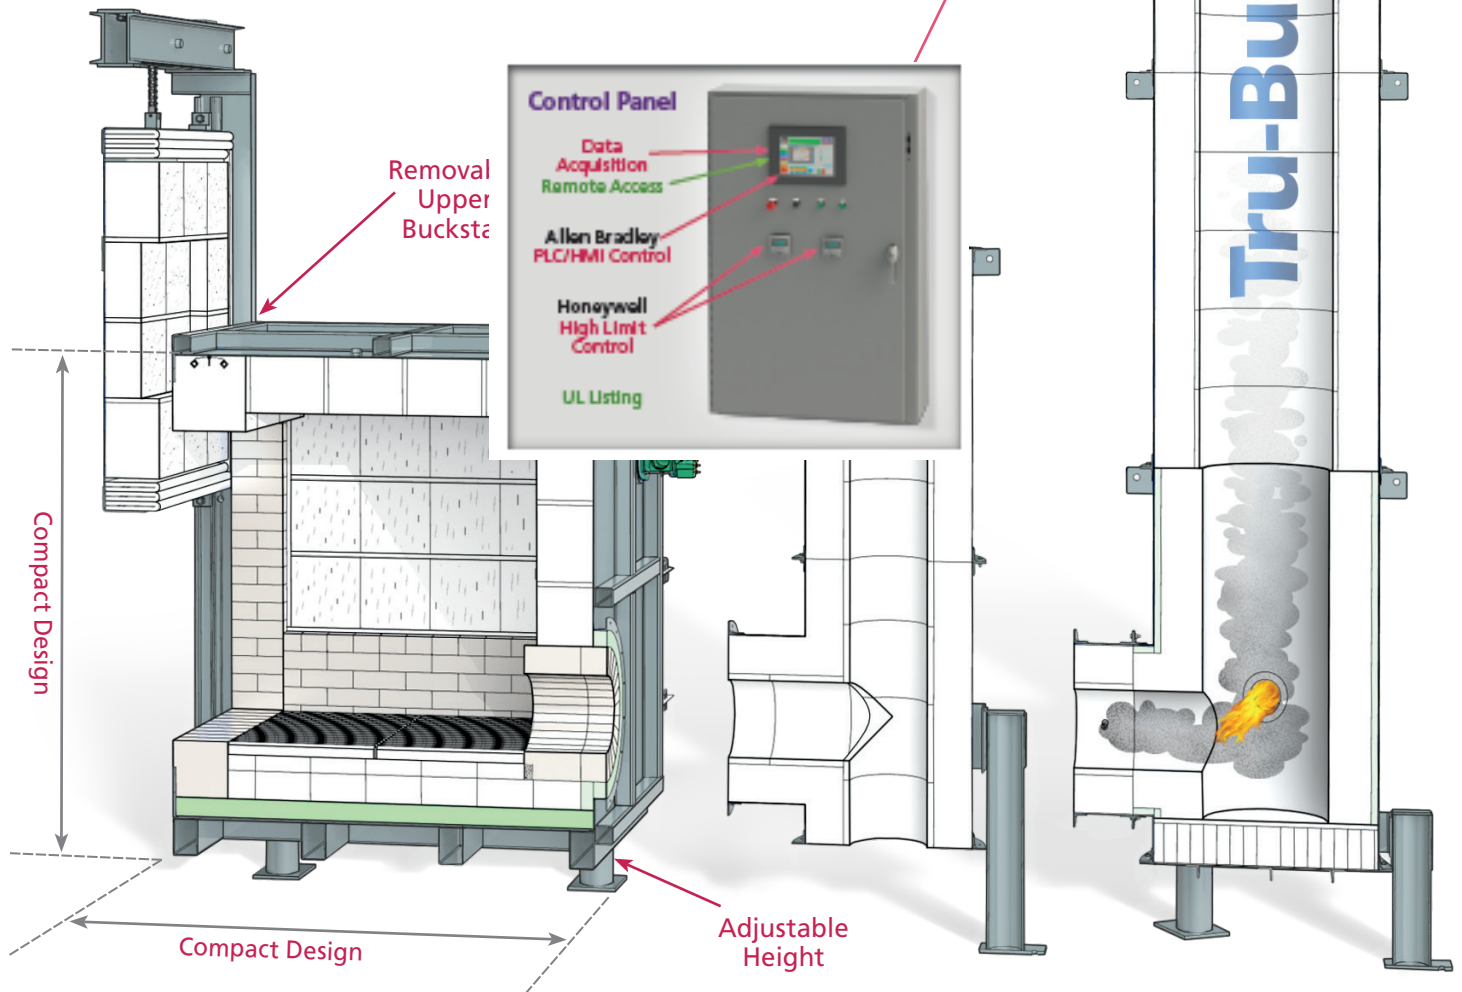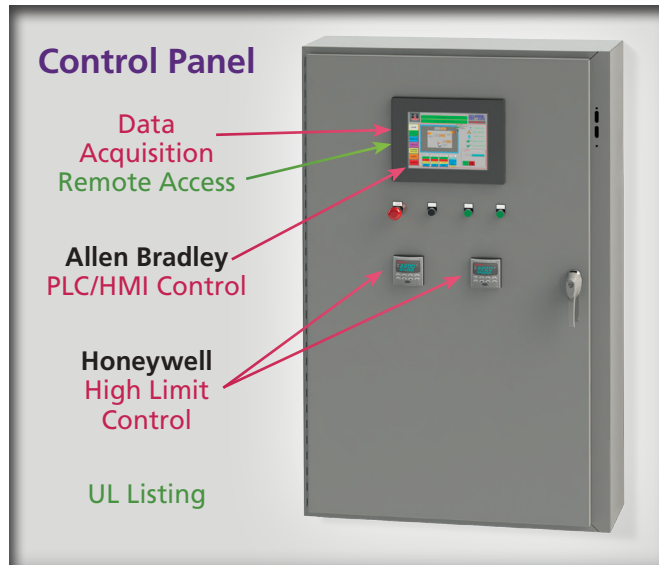

Armil CFS, Inc.

15660 La Salle Street, South Holland, IL 60473
708-339-6810 office • 708-339-0517 fax
email: info@armilcfs.com
www.armilcfs.com

© 2013-2023, Armil CFS, Inc. • Bulletin 2013-1

