



# Tru-Heat<sup>®</sup>

1400° – 2200°F WRF  
(Wax Reclamation Furnace)

## Standards

NFPA 86  
UL 508A

Hearth  
Width × Depth Door  
Height


|    |    |    |
|----|----|----|
| 3' | 3' | 3' |
| 4' | 4' |    |

(Custom sizes available)

Fiberfrax<sup>™</sup> Lining

6" – 1800°F

9" – 2200°F

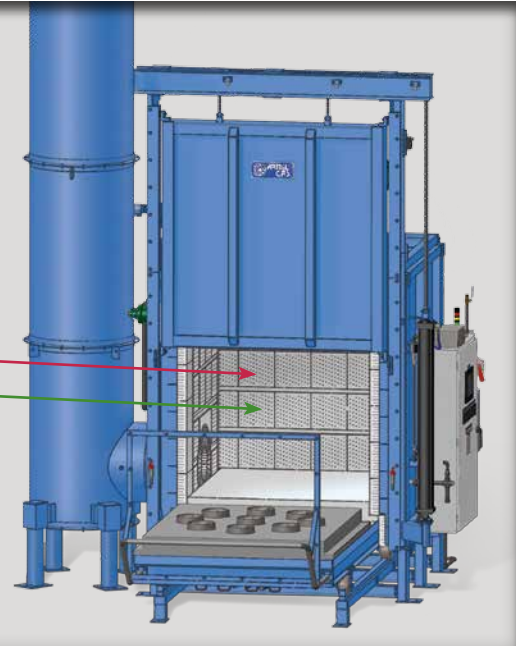

Afterburner

Natural Gas  
Propane  
Butane

5-1  
Door Safety  
Rating

## Features


Standard  
Optional

Custom Hearth Positions  
to Meet Mold Dimensions

Manual or Automatic  
Hearth Car Movement

% O<sub>2</sub> Trim

# Tru-Heat® 1400° – 2200°F WRF (Wax Reclamation Furnace)

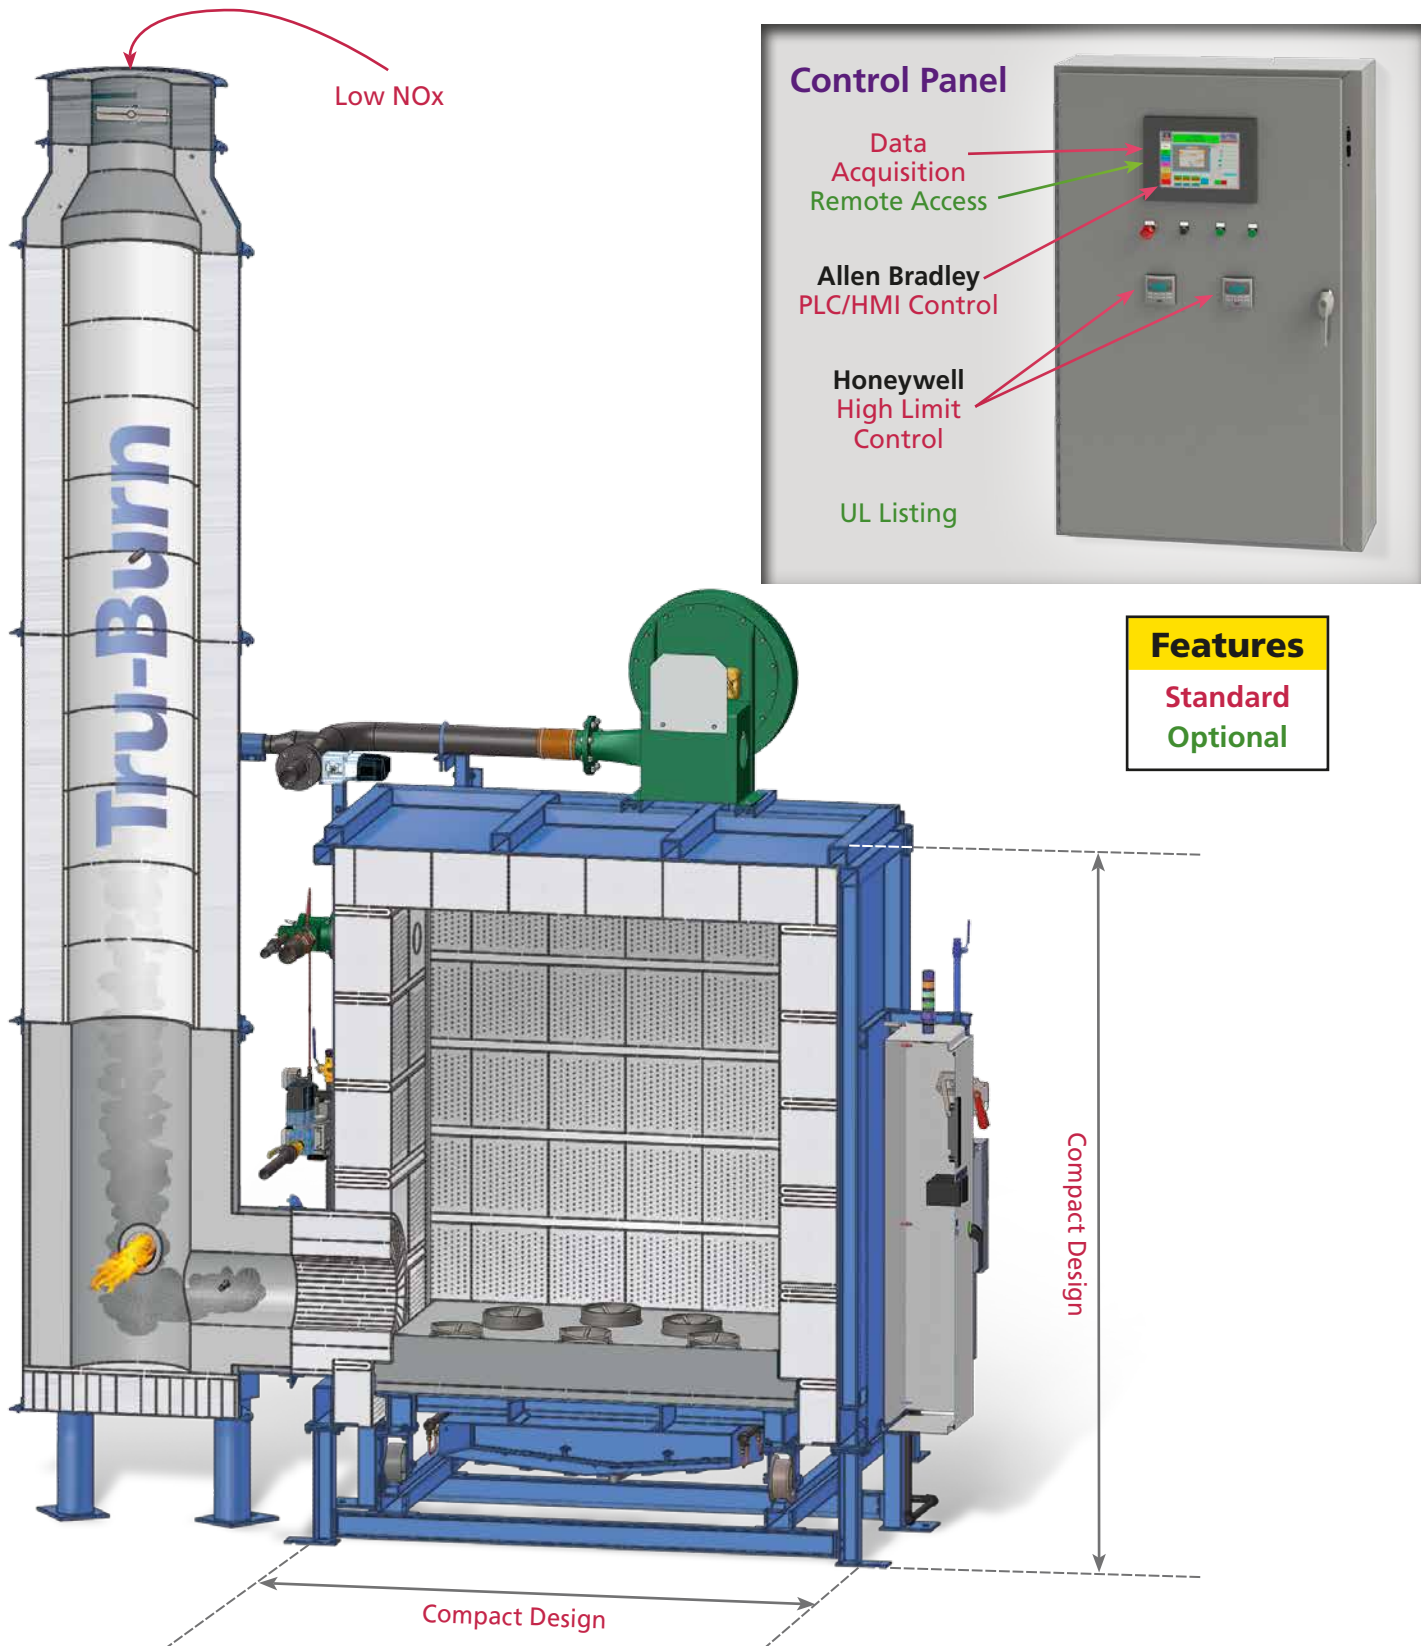

## Armil CFS, Inc.

15660 La Salle Street, South Holland, IL 60473  
708-339-6810 office • 708-339-0517 fax  
email: [info@armilcfs.com](mailto:info@armilcfs.com)  
[www.armilcfs.com](http://www.armilcfs.com)

© 2018, Armil CFS, Inc.

